## Shijiazhuang standards rubber products co., ltd

# PVC HOSE CATALOG









ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

## ABOUT US

Shijiazhuang Standards Rubber Products Co., Ltd Is a Highly Professional And Experienced Manufacturer Of PVC Hoses In China. We Have Specialized In This Field Over 10 Years And Always Dedicated To The Producing Of PVC Hoses In High Quality, With a Wide Range Of Demands From Multiple Industries, Including Engineering, Agricultural irrigation,Forestry sprinkler,Forestry sprinkler,Ocean, Mining, Chemicals Plastics, Transportation, Oil, Metallurgy,etc.

**OUR PRODUCTS INCLUDE:**

1. **Pvc Layflat Hose**
2. **Pvc Helix Suction & Delivery Hose**
3. **Pvc Spiral Steel Wire Reinforced Hose**
4. **Pvc Anti-Static Spiral Steel Wire Polyester Reinforced Hose**
5. **Pvc Fiber Braided Reinforced Hose**
6. **High Pressure Pvc Spray Hose**
7. **Pvc Air/Gas Hose**
8. **Pvc Twin Welding Hose**
9. **Pvc Transparent Soft Hose**

**Why Choose Us:**


1. Our Chairman, Who Came From Technical Backgrounds, Devoted In PVC HOSE Industry Since The Year 2010.
2. Professional r&d Team With Rich Experience.
3. Only The Best Raw Materials From Korea and Europe.
4. Only The Most Advanced Equipments From Italy Vp.
5. Only The Best Processes And Strict Inspection.
6. Efficient Sales Team With Satisfying Service.

Carry Lonely,Just Keep The Honor.The Proleader Research Team Through The Temptations Of Pride Era Precipitated a Brilliant Investigator.It Has Made Outstanding Contributions To The Scientific And Technological Innovation Of Enterprises

**We Sincerely Welcome Partners All Over The World To Visit Us For Win-Win Cooperation!**

# PVC LAYFLAT HOSE



**Description of PVC Layflat Hose:**

PVC Layflat hose is a tough water discharge hoses made with a PVC cover and reinforced polyester yarn. The high tensile polyester yarn provides great durability and strength in all working situations. It is highly durable while maintaining great flexibility and best suited for low - medium pressure applications.

**Applications of PVC Layflat Hose:**

PVC layflat hose is designed for light and heavy duty applications, the hoses are most commonly used in agricultural equipment where continuous water flow through irrigation systems is required. Additional uses include water pump, pool & spa, construction, mines and marine.

**WORKING TEMPERATURE :** 5℃-65℃

**Specification**

**(standard duty)**

| Inner Diameter | | W.P. | | B.P. | | Length | Weight | Volume |
|---|---|---|---|---|---|---|---|---|
| inch | mm | psi | bar | psi | bar | m/roll | kg/m | m3 |
| 3/4" | 20 | 58 | 4 | 218 | 15 | 100 | 0.14 | 0.014 |
| 1" | 25 | 58 | 4 | 218 | 15 | 100 | 0.15 | 0.019 |
| 1-1/4" | 32 | 58 | 4 | 218 | 15 | 100 | 0.17 | 0.023 |
| 1-1/2" | 38 | 58 | 4 | 218 | 15 | 100 | 0.21 | 0.026 |
| 2" | 51 | 58 | 4 | 174 | 12 | 100 | 0.23 | 0.039 |
| 2.5" | 64 | 58 | 4 | 174 | 12 | 100 | 0.32 | 0.047 |
| 3" | 76 | 58 | 4 | 174 | 12 | 100 | 0.36 | 0.060 |
| 4" | 102 | 58 | 4 | 174 | 12 | 100 | 0.55 | 0.083 |
| 5" | 127 | 58 | 4 | 174 | 12 | 100 | 0.75 | 0.109 |
| 6" | 153 | 58 | 4 | 174 | 12 | 100 | 0.90 | 0.141 |
| 8" | 203 | 58 | 4 | 174 | 12 | 100 | 1.80 | 0.193 |
| 10" | 254 | 58 | 4 | 174 | 12 | 50 | 2.60 | 0.178 |
| 12" | 305 | 58 | 4 | 174 | 12 | 50 | 3.10 | 0.245 |

ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

**Specification**
**(medium duty)**

| Inner Diameter | | W.P. | | B.P. | | Length | Weight | Volume |
|---|---|---|---|---|---|---|---|---|
| inch | mm | psi | bar | psi | bar | m/roll | kg/m | m3 |
| 3/4" | 20 | 87 | 6 | 305 | 21 | 100 | 0.14 | 0.014 |
| 1" | 25 | 87 | 6 | 305 | 21 | 100 | 0.17 | 0.019 |
| 1-1/4" | 32 | 87 | 6 | 305 | 21 | 100 | 0.19 | 0.023 |
| 1-1/2" | 38 | 87 | 6 | 305 | 21 | 100 | 0.24 | 0.026 |
| 1-1/2" | 40 | 87 | 6 | 261 | 18 | 100 | 0.26 | 0.026 |
| 2" | 51 | 87 | 6 | 261 | 18 | 100 | 0.30 | 0.039 |
| 2.5" | 64 | 87 | 6 | 261 | 18 | 100 | 0.45 | 0.047 |
| 3" | 76 | 87 | 6 | 261 | 18 | 100 | 0.50 | 0.060 |
| 4" | 102 | 87 | 6 | 261 | 18 | 100 | 0.90 | 0.083 |
| 5" | 127 | 87 | 6 | 261 | 18 | 100 | 1.10 | 0.109 |
| 6" | 153 | 87 | 6 | 261 | 18 | 100 | 1.80 | 0.141 |
| 8" | 203 | 87 | 6 | 261 | 18 | 100 | 2.80 | 0.193 |

**Specification**
**(heavy duty)**

| Inner Diameter | | W.P. | | B.P. | | Length | Weight | Volume |
|---|---|---|---|---|---|---|---|---|
| inch | mm | psi | bar | psi | bar | m/roll | kg/m | m3 |
| 3/4" | 20 | 145 | 10 | 435 | 30 | 50 | 0.15 | 0.007 |
| 1" | 25 | 145 | 10 | 435 | 30 | 50 | 0.20 | 0.010 |
| 1-1/4" | 32 | 145 | 10 | 435 | 30 | 50 | 0.21 | 0.012 |
| 1-1/2" | 38 | 145 | 10 | 435 | 30 | 50 | 0.29 | 0.013 |
| 1-1/2" | 40 | 145 | 10 | 435 | 30 | 50 | 0.30 | 0.013 |
| 1-3/4" | 45 | 145 | 10 | 435 | 30 | 50 | 0.35 | 0.018 |
| 2" | 51 | 116 | 8 | 348 | 24 | 50 | 0.35 | 0.020 |
| 2" | 51 | 145 | 10 | 435 | 30 | 50 | 0.42 | 0.020 |
| 2.5" | 64 | 145 | 10 | 435 | 30 | 50 | 0.70 | 0.024 |
| 3" | 76 | 116 | 8 | 348 | 24 | 50 | 0.66 | 0.030 |
| 3" | 76 | 145 | 10 | 435 | 30 | 50 | 0.85 | 0.030 |
| 4" | 102 | 116 | 8 | 348 | 24 | 50 | 1.00 | 0.042 |
| 4" | 102 | 145 | 10 | 435 | 30 | 50 | 1.20 | 0.042 |
| 6" | 153 | 116 | 8 | 348 | 24 | 50 | 2.20 | 0.071 |
| 8" | 203 | 116 | 8 | 348 | 24 | 50 | 2.80 | 0.010 |

# PVC HELIX SUCTION & DELIVERY HOSE






**Description of PVC Suction Hose:**

Suitable for conveying powder,grain,water and oil,etc.in the industry,agricuilture,irrigation and civil engineering.It is the ideal alternative of rubber hose and metal pipe. Light,elastic,minus pressure resistant and with good adaptability.


**WORKING TEMPERATURE :** 5℃-65℃

**Specification**

| SIZE | ID | | OD | LENGTH | W.P | B.P | PACKING SIZE |
|---|---|---|---|---|---|---|---|
| | inch | mm | MM | M/ROLL | Mpa | Mpa | mm |
| 16×2.5 | 5/8 | 16 | 21 | 50 | -0.1~0.4 | 1 | 600×230 |
| 19×3 | 3/4 | 19 | 25 | | -0.1~0.4 | 1 | 610×160 |
| 25×3.5 | 1 | 25 | 32 | | -0.1~0.6 | 2 | 660×200 |
| 32×4 | 1-1/4 | 32 | 40 | | -0.1~0.7 | 2.1 | 780×320 |
| 38×4 | 1-1/2 | 38 | 46 | | -0.1~0.6 | 1.8 | 730×340 |
| 51×4.5 | 2 | 51 | 60 | | -0.1~0.6 | 1.8 | 900×320 |
| 64×4.5 | 2-1/2 | 64 | 73 | 20 | -0.1~0.5 | 1.5 | 820×300 |
| 76×5 | 3 | 76 | 86 | | -0.1~0.4 | 1.2 | 910×350 |
| 102×5.5 | 4 | 102 | 113 | | -0.1~0.3 | 1 | 1100×450 |
| 127×6 | 5 | 127 | 139 | | -0.1~0.3 | 1 | 1250×600 |
| 152×7 | 6 | 152 | 166 | | -0.1~0.3 | 1 | 1400×680 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# PVC SPIRAL STEEL WIRE REINFORCED HOSE





**Description of PVC Steel Wire Hose:**

The hose is widely used for drawing and conveying water,oil and powder in factories,agriculture,engineering,foodstuffs and sanita-tion lines.This hoes,with steel wire screwing inlaid in the hose,is light,transparent,with small bending radius.It has good adaptability to hard weather conditions and minus pressure.With colorful symbol lines on the surface of the hose,it can be more beautiful.

**WORKING TEMPERATURE :** 5℃-65℃

**Specification**

| INCH | METRIC MEASUREMENT | | | W.P. | B.P. MPA | | WEIGHT | PACKING MEASUREMENT |
|---|---|---|---|---|---|---|---|---|
| | I.D. MM | O.D. MM | M/ROLL | MPA | AT23ºC | AT60ºC | KG/ROLL | D×H MM |
| 5/16 | 8 | 13 | 100 | -0.1~1.1 | 3.3 | 1.6 | 12.4 | 400×200 |
| 3/8 | 9 | 15 | | | 3.3 | 1.5 | 18 | 480×180 |
| 1/2 | 12 | 18 | | -0.1~1 | 3 | 1.5 | 22 | 540×180 |
| 5/8 | 15 | 22 | | | 3 | 1.3 | 31 | 600×230 |
| 3/4 | 19 | 26 | 50 | -0.1~1 | 3 | 1.2 | 19 | 610×160 |
| 1 | 25 | 33 | | -0.1~0.7 | 2.5 | 1 | 27.5 | 660×220 |
| 1-1/4 | 32 | 41 | 40 | | 2 | 0.9 | 31.6 | 750×250 |
| 1-1/2 | 38 | 48 | | -0.1~0.6 | 1.8 | 0.8 | 40.5 | 740×300 |
| 1-3/4 | 45 | 56 | | | 1.7 | 0.8 | 53.5 | 850×290 |
| 1-7/8 | 48 | 59 | | -0.1~0.5 | 1.6 | 0.7 | 56 | 900×300 |
| 2 | 50 | 62 | | | 1.6 | 0.7 | 63 | 930×340 |
| 2/3-8 | 60 | 74 | 30 | | 1.5 | 0.7 | 67 | 900×380 |
| 2-1/2 | 63 | 80 | 20 | | 1.5 | 0.5 | 57.5 | 950-1000×240 |






ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 3 | 75 | 92 | | -0.1~0.4 | 1.3 | 0.5 | 66.8 | 1000-1020 ×280 |
| 2-1/2 | 90 | 108 | | | 1.2 | 0.5 | 84 | 1060-1100 ×440 |
| 4 | 100 | 118 | | -0.1~0.3 | 1 | 0.5 | 93 | 1150×360 |
| 5 | 127 | 143 | | | 1 | 0.5 | 102 | 1430×430 |
| 6 | 152 | 168 | | | 1 | 0.5 | 121 | 1430×480 |
| 8 | 200 | 220 | | | 1 | 0.5 | 220 | 2200×430 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# PVC ANTI-STATIC SPIRAL STEEL WIRE POLYESTER REINFORCED HOSE


**APPLICATIONS :**

This hose can be widely used in oil depot and gas station and easy to produce electrostatic place ,also can be used in pneumatic device , compressor , eng ine parts , mechanical maintenance , civil engineering wind guns high pressure tube

**CHARACTERISTICS :**

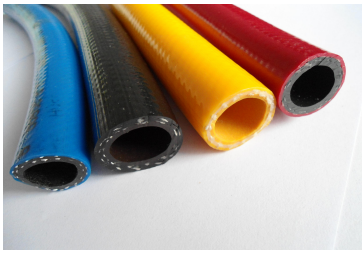
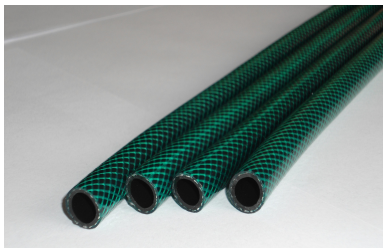
This hose uses the high strength fiber and galvanized spring steel wire as reinforcing material , shirt-sleeve PVC steel wire spiral enhance hose and pvc fiber reinforced hose characteristics , greatly enhance the product compressive properties , pressure can achieve steel wire spiral enhance hose 2-4 times and fiber reinforced hose 1-2 times , join electrostatic conductor ,have derived electrostatic interaction

**WORKING TEMPERATURE :** 5℃-65℃

| HOSE SIZE | METRIC SIZE | | LENGTH | MAX.W.P. | MAX.B.P. |
|---|---|---|---|---|---|
| INCH | I.D. MM | O.D. MM | M/ROLL | AT 23℃ | |
| | | | | BAR | BAR |
| 5/8" | 16 | 23 | 50 | -1-12 | 36 |
| 3/4" | 19 | 27 | 50 | -1-10 | 30 |
| 1" | 25 | 33 | 50 | -1-10 | 30 |
| 1-1/4" | 32 | 40 | 50 | -1-7 | 21 |
| 1-1/2" | 38 | 48 | 50 | -1-7 | 21 |
| 1-3/4" | 45 | 56 | 50 | -1-7 | 21 |
| 1-7/8" | 48 | 59 | 50 | -1-7 | 21 |
| 2" | 50 | 62 | 50 | -1-7 | 21 |
| 2-5/16" | 58 | 69 | 40 | -1-5 | 15 |
| 2-1/2" | 64 | 78 | 30 | -1-5 | 15 |
| 3" | 76 | 90 | 30 | -1-5 | 15 |
| 3-1/2" | 90 | 108 | 20 | -1-5 | 15 |
| 4" | 102 | 116 | 20 | -1-5 | 15 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# PVC FIBER BRAIDED REINFORCED HOSE


**APPLICATIONS:**

The product is used for conveying water,oil,gas under normal working condition in the factory,farm,ship,building and famliy.

**CHARACTERISTICS:**

It is flexble,transparent,durable,non-toxic,without order,anti-erosion and adaptable to high pressure condition. By adding colorful symbol lines on the surface of the hose,it looks more beautiful.

WORKING TEMPERATURE:-5ºC~65ºC

| I.D | | OD | LENGTH | W.P | B.P | WT | PACKING SIZE |
|---|---|---|---|---|---|---|---|
| inch | mm | MM | M/ROLL | Mpa | Mpa | KG | CM |
| 13/64 | 5 | 9 | 170 | 0.8 | 2.5 | 10 | 420×130 |
| 1/4 | 6 | 10 | 148 | 1 | 3 | 10 | 430×135 |
| | 6 | 11 | 112 | 1 | 3 | 10 | 400×150 |
| | 6 | 12 | 88 | 1 | 3 | 10 | 400×150 |
| 5/16 | 8 | 12 | 118 | 1 | 3 | 10 | 440×150 |
| | 8 | 13 | 90 | 1 | 3 | 10 | 425×145 |
| | 8 | 14 | 72 | 1 | 3 | 10 | 420×145 |
| 3/8 | 9 | 13 | 108 | 0.9 | 2.7 | 10 | 430×150 |
| | 9 | 14 | 83 | 0.9 | 2.7 | 10 | 425×150 |
| 13/32 | 10 | 14 | 100 | 0.8 | 2.4 | 10 | 440×150 |
| | 10 | 15 | 76 | 0.8 | 2.4 | 10 | 425×155 |
| | 10 | 16 | 61 | 0.8 | 2.4 | 10 | 430×140 |
| 1/2 | 12 | 16 | 169 | 0.7 | 2.1 | 20 | 560×180 |
| | 12 | 17 | 130 | 0.7 | 2.1 | 20 | 560×200 |
| | 12 | 18 | 105 | 0.9 | 2.7 | 20 | 560×185 |
| 1/2 | 13 | 17 | 158 | 0.6 | 1.8 | 20 | 560×195 |
| | 13 | 18 | 122 | 0.6 | 1.8 | 20 | 570×190 |
| | 13 | 19 | 99 | 0.8 | 2.4 | 20 | 560×200 |
| 35/64 | 14 | 19 | 115 | 0.7 | 2.1 | 20 | 560×210 |



ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | 14 | 20 | 93 | 0.7 | 2.1 | 20 | 540×220 |
| 5/8 | 15 | 19 | 138 | 0.6 | 1.8 | 20 | 630×195 |
| | 15 | 20 | 108 | 0.7 | 2.1 | 20 | 580×220 |
| | 15 | 21 | 87 | 0.8 | 2.4 | 20 | 580×220 |
| | 16 | 20 | 131 | 0.5 | 1.5 | 20 | 580×220 |
| | 16 | 21 | 102 | 0.7 | 2.1 | 20 | 580×220 |
| | 16 | 22 | 83 | 0.8 | 2.4 | 20 | 570×205 |
| 45/64 | 18 | 24 | 75 | 0.6 | 1.8 | 20 | 570×195 |
| 3/4 | 19 | 23 | 112 | 0.4 | 1.2 | 20 | 640×215 |
| | 19 | 24 | 88 | 0.4 | 1.2 | 20 | 600×210 |
| | 19 | 25 | 72 | 0.7 | 2.1 | 20 | 580×210 |
| | 19 | 26 | 60 | 0.8 | 2.4 | 20 | 570×210 |
| 25/32 | 20 | 25 | 84 | 0.6 | 1.8 | 20 | 615×210 |
| | 20 | 26 | 68 | 0.6 | 1.8 | 20 | 610×185 |
| | 20 | 27 | 58 | 0.7 | 2.1 | 20 | 590×210 |
| 55/64 | 22 | 30 | 46 | 0.7 | 2.1 | 20 | 580×220 |
| 1 | 25 | 30 | 69 | 0.4 | 1.2 | 20 | 640×230 |
| | 25 | 31 | 56 | 0.5 | 1.5 | 20 | 650×220 |
| | 25 | 32 | 47 | 0.5 | 1.5 | 20 | 610×250 |
| 1-1/4 | 32 | 39 | 57 | 0.4 | 1.2 | 30 | 770×230 |
| | 32 | 40 | 49 | 0.5 | 1.5 | 30 | 760×290 |
| | 32 | 41 | 43 | 0.5 | 1.5 | 30 | 750×250 |
| 1-1/2 | 38 | 45 | 49 | 0.4 | 1.2 | 30 | 770×240 |
| | 38 | 46 | 42 | 0.4 | 1.2 | 30 | 770×240 |
| | 38 | 47 | 37 | 0.4 | 1.2 | 30 | 780×280 |
| 1-3/4 | 45 | 55 | 47 | 0.4 | 1.2 | 50 | 960×340 |
| 2 | 50 | 58 | 55 | 0.3 | 0.9 | 50 | 980×240 |
| | 50 | 59 | 48 | 0.4 | 1.2 | 50 | 980×240 |
| | 50 | 60 | 43 | 0.4 | 1.2 | 50 | 980×240 |
| | 50 | 62 | 35 | 0.4 | 1.2 | 50 | 930×380 |
| 2-33/64 | 64 | 78 | 24 | 0.4 | 1.2 | 50 | 1050×280 |
| 3 | 75 | 90 | 20 | 0.4 | 1.2 | 50 | 1080×300 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# High pressure PVC spray hose








**APPLICATIONS:**

The hose is widely uesd in pneumatic tools,pneumatic washing apparatus, compressors, engine components, machine service and civil engineering equipments.

**CHARACTERISTICS:**

Being made of tough PVC materials and high tensile polyester reinforcement,this hose can work under very high working pressure. it is light,flexble,durable,anti-erosion,and explosion resistant.specification(standard duty)

WORKING TEMPERATURE:-5ºC~65ºC

**Specification**

| I.D | | OD | LENGTH | W.P | B.P | WT | PACKING SIZE |
|---|---|---|---|---|---|---|---|
| inch | mm | MM | M/ROLL | bar | bar | KG | CM |
| 1/4 | 6 | 11 | 100 | 40 | 120 | 9 | 360×220 |
| 5/16 | 8 | 13.5 | | 40 | 120 | 13 | 390×220 |
| 3/8 | 9 | 15 | | 30 | 90 | 15 | 460×220 |
| 13/32 | 10 | 16 | | | | 16.5 | 480×180 |
| 1/2 | 12 | 18 | | 30 | 90 | 19 | 480×250 |
| 5/8 | 15 | 22 | | | | 27 | 560×250 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# PVC AIR/GAS HOSE






## APPLICATIONS

Being used for conveying gas and air in family and engineering .

## CHARACTERISTICS

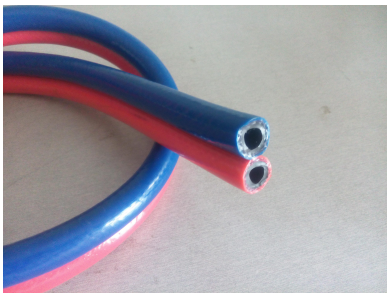

Being made from good quality PVC and rubber compound , the hose is flexible , elastic , easy to seal and adaptable to high pressure and hard weather conditions

WORKING TEMPERATURE:-5ºC~65ºC

| I.D | | OD | LENGTH | W.P | B.P | WT | PACKING SIZE |
|---|---|---|---|---|---|---|---|
| inch | mm | MM | M/ROLL | bar | bar | KG | CM |
| 1/4 | 6 | 11 | 100 | 20 | 60 | 9 | 360×220 |
| 5/16 | 8 | 13.5 | | 20 | 60 | 13 | 390×220 |
| 3/8 | 9 | 15 | | 18 | 54 | 15 | 460×220 |
| 13/32 | 10 | 16 | | | | 16.5 | 480×180 |
| 1/2 | 12 | 18 | | 17 | 51 | 19 | 480×250 |
| 5/8 | 15 | 22 | | | | 27 | 560×250 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# PVC TWIN WELDING HOSE


**APPLICATTONS :**

Being widely used in welding machine , architecture and lacquer factory

**CHARACTERISTICS**


Two tubes welded together , light , elastic easy to handle , anti-erosion , resistant to fire and easy to distinguish due to the different colors of the tube

WORKING TEMPERATURE:-5ºC~65ºC

| I.D | | OD | LENGTH | W.P | B.P | WT | PACKING SIZE |
|---|---|---|---|---|---|---|---|
| inch | mm | MM | M/ROLL | bar | bar | KG | CM |
| 1/4 | 6 | 12 | 50 | 20 | 60 | 9 | 360×220 |
| 5/16 | 8 | 13.5 | | 18 | 54 | 13 | 390×220 |
| 3/8 | 9 | 15 | | 15 | 45 | 15 | 460×220 |
| 13/32 | 10 | 16 | | | | 16.5 | 480×180 |
| 1/2 | 12 | 18 | | 15 | 45 | 19 | 480×250 |
| 5/8 | 15 | 22 | | | | 27 | 560×250 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

# PVC TRANSPARENT SOFT HOSE





**APPLICATIONS:**

The product is used for conveying water,oil,gas under normal working condition in the factory,farm,ship,building and famliy.

**CHARACTERISTICS:**

It is flexble,transparent,durable,non-toxic,without order,anti-erosion and adaptable to high pressure condition. By adding colorful symbol lines on the surface of the hose,it looks more beautiful.

WORKING TEMPERATURE:-5ºC~65ºC

| ID | | OD | LENGTH | W.P | B.P | WT | PACKING SIZE |
|---|---|---|---|---|---|---|---|
| inch | mm | MM | M/ROLL | bar | bar | KG | CM |
| 13/64 | 5 | 9 | 170 | 0.8 | 2.5 | 10 | 420×130 |
| 1/4 | 6 | 10 | 148 | 1 | 3 | 10 | 430×135 |
| | 6 | 11 | 112 | 1 | 3 | 10 | 400×150 |
| | 6 | 12 | 88 | 1 | 3 | 10 | 400×150 |
| 5/16 | 8 | 12 | 118 | 1 | 3 | 10 | 440×150 |
| | 8 | 13 | 90 | 1 | 3 | 10 | 425×145 |
| | 8 | 14 | 72 | 1 | 3 | 10 | 420×145 |
| 3/8 | 9 | 13 | 108 | 0.9 | 2.7 | 10 | 430×150 |
| | 9 | 14 | 83 | 0.9 | 2.7 | 10 | 425×150 |
| 13/32 | 10 | 14 | 100 | 0.8 | 2.4 | 10 | 440×150 |
| | 10 | 15 | 76 | 0.8 | 2.4 | 10 | 425×155 |
| | 10 | 16 | 61 | 0.8 | 2.4 | 10 | 430×140 |
| 1/2 | 12 | 16 | 169 | 0.7 | 2.1 | 20 | 560×180 |
| | 12 | 17 | 130 | 0.7 | 2.1 | 20 | 560×200 |
| | 12 | 18 | 105 | 0.9 | 2.7 | 20 | 560×185 |
| 1/2 | 13 | 17 | 158 | 0.6 | 1.8 | 20 | 560×195 |
| | 13 | 18 | 122 | 0.6 | 1.8 | 20 | 570×190 |



ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | 13 | 19 | 99 | 0.8 | 2.4 | 20 | 560×200 |
| 35/64 | 14 | 19 | 115 | 0.7 | 2.1 | 20 | 560×210 |
| | 14 | 20 | 93 | 0.7 | 2.1 | 20 | 540×220 |
| 5/8 | 15 | 19 | 138 | 0.6 | 1.8 | 20 | 630×195 |
| | 15 | 20 | 108 | 0.7 | 2.1 | 20 | 580×220 |
| | 15 | 21 | 87 | 0.8 | 2.4 | 20 | 580×220 |
| | 16 | 20 | 131 | 0.5 | 1.5 | 20 | 580×220 |
| | 16 | 21 | 102 | 0.7 | 2.1 | 20 | 580×220 |
| | 16 | 22 | 83 | 0.8 | 2.4 | 20 | 570×205 |
| 45/64 | 18 | 24 | 75 | 0.6 | 1.8 | 20 | 570×195 |
| 3/4 | 19 | 23 | 112 | 0.4 | 1.2 | 20 | 640×215 |
| | 19 | 24 | 88 | 0.4 | 1.2 | 20 | 600×210 |
| | 19 | 25 | 72 | 0.7 | 2.1 | 20 | 580×210 |
| | 19 | 26 | 60 | 0.8 | 2.4 | 20 | 570×210 |
| 25/32 | 20 | 25 | 84 | 0.6 | 1.8 | 20 | 615×210 |
| | 20 | 26 | 68 | 0.6 | 1.8 | 20 | 610×185 |
| | 20 | 27 | 58 | 0.7 | 2.1 | 20 | 590×210 |
| 55/64 | 22 | 30 | 46 | 0.7 | 2.1 | 20 | 580×220 |
| 1 | 25 | 30 | 69 | 0.4 | 1.2 | 20 | 640×230 |
| | 25 | 31 | 56 | 0.5 | 1.5 | 20 | 650×220 |
| | 25 | 32 | 47 | 0.5 | 1.5 | 20 | 610×250 |
| 1-1/4 | 32 | 39 | 57 | 0.4 | 1.2 | 30 | 770×230 |
| | 32 | 40 | 49 | 0.5 | 1.5 | 30 | 760×290 |
| | 32 | 41 | 43 | 0.5 | 1.5 | 30 | 750×250 |
| 1-1/2 | 38 | 45 | 49 | 0.4 | 1.2 | 30 | 770×240 |
| | 38 | 46 | 42 | 0.4 | 1.2 | 30 | 770×240 |
| | 38 | 47 | 37 | 0.4 | 1.2 | 30 | 780×280 |
| 1-3/4 | 45 | 55 | 47 | 0.4 | 1.2 | 50 | 960×340 |
| 2 | 50 | 58 | 55 | 0.3 | 0.9 | 50 | 980×240 |
| | 50 | 59 | 48 | 0.4 | 1.2 | 50 | 980×240 |
| | 50 | 60 | 43 | 0.4 | 1.2 | 50 | 980×240 |
| | 50 | 62 | 35 | 0.4 | 1.2 | 50 | 930×380 |
| 2-33/64 | 64 | 78 | 24 | 0.4 | 1.2 | 50 | 1050×280 |
| 3 | 75 | 90 | 20 | 0.4 | 1.2 | 50 | 1080×300 |


ADD: NO. 260 TANGU NAN STREET, YUHUA DISTRICT.SHIJIAZHUANG, HEBEI, CHINA
TELL: +86-311-67267751